


**SITE NOTES**

- DISPOSE OF 6 MARKED CONC. BARRIERS.
- RELOCATE ALL PERIMETER CONC. BARRIERS, ON SITE, TO COMPLETE WORK REQUIRED
- RELOCATE/PROTECT ALL PRECAST CONCRETE CAR BUMPERS. THEY WILL BE RELOCATED SEE SHEET C1.8 FOR NEW LAYOUT PLAN,
- DEMOLISH 3- 5/8" REBAR 20" LONG PER PRECAST CONC. CAR BUMPER
- REMOVAL AND HAUL OFF OF DIRT TO MEET NEW GRADES ARE RESPONSIBILITY OF CONTRACTOR AND IS PART OF THE DEMOLITION NOT SHOWN ON THIS SHEET.

**LEGEND**

- REMOVE ASPHALT AND BASE (975 SY)
- REMOVE ASPHALT (951 SY)
- STRIP 8" OF TOPSOIL (139 SY)
- STRIP 4" OF TOPSOIL AND 18" OF SUB SOIL (375 SY)
- STRIP 8" OF GRAVEL AND 12" OF SUB SOIL (992 SY)
- REMOVE CONCRETE SIDEWALK
- MIL 2" ASPHALT (12,112 SY)
- REGRADE GRAVEL LOT (8,696 SY) REMOVE ROUGHLY 2" TO MEET NEW ELEVATIONS

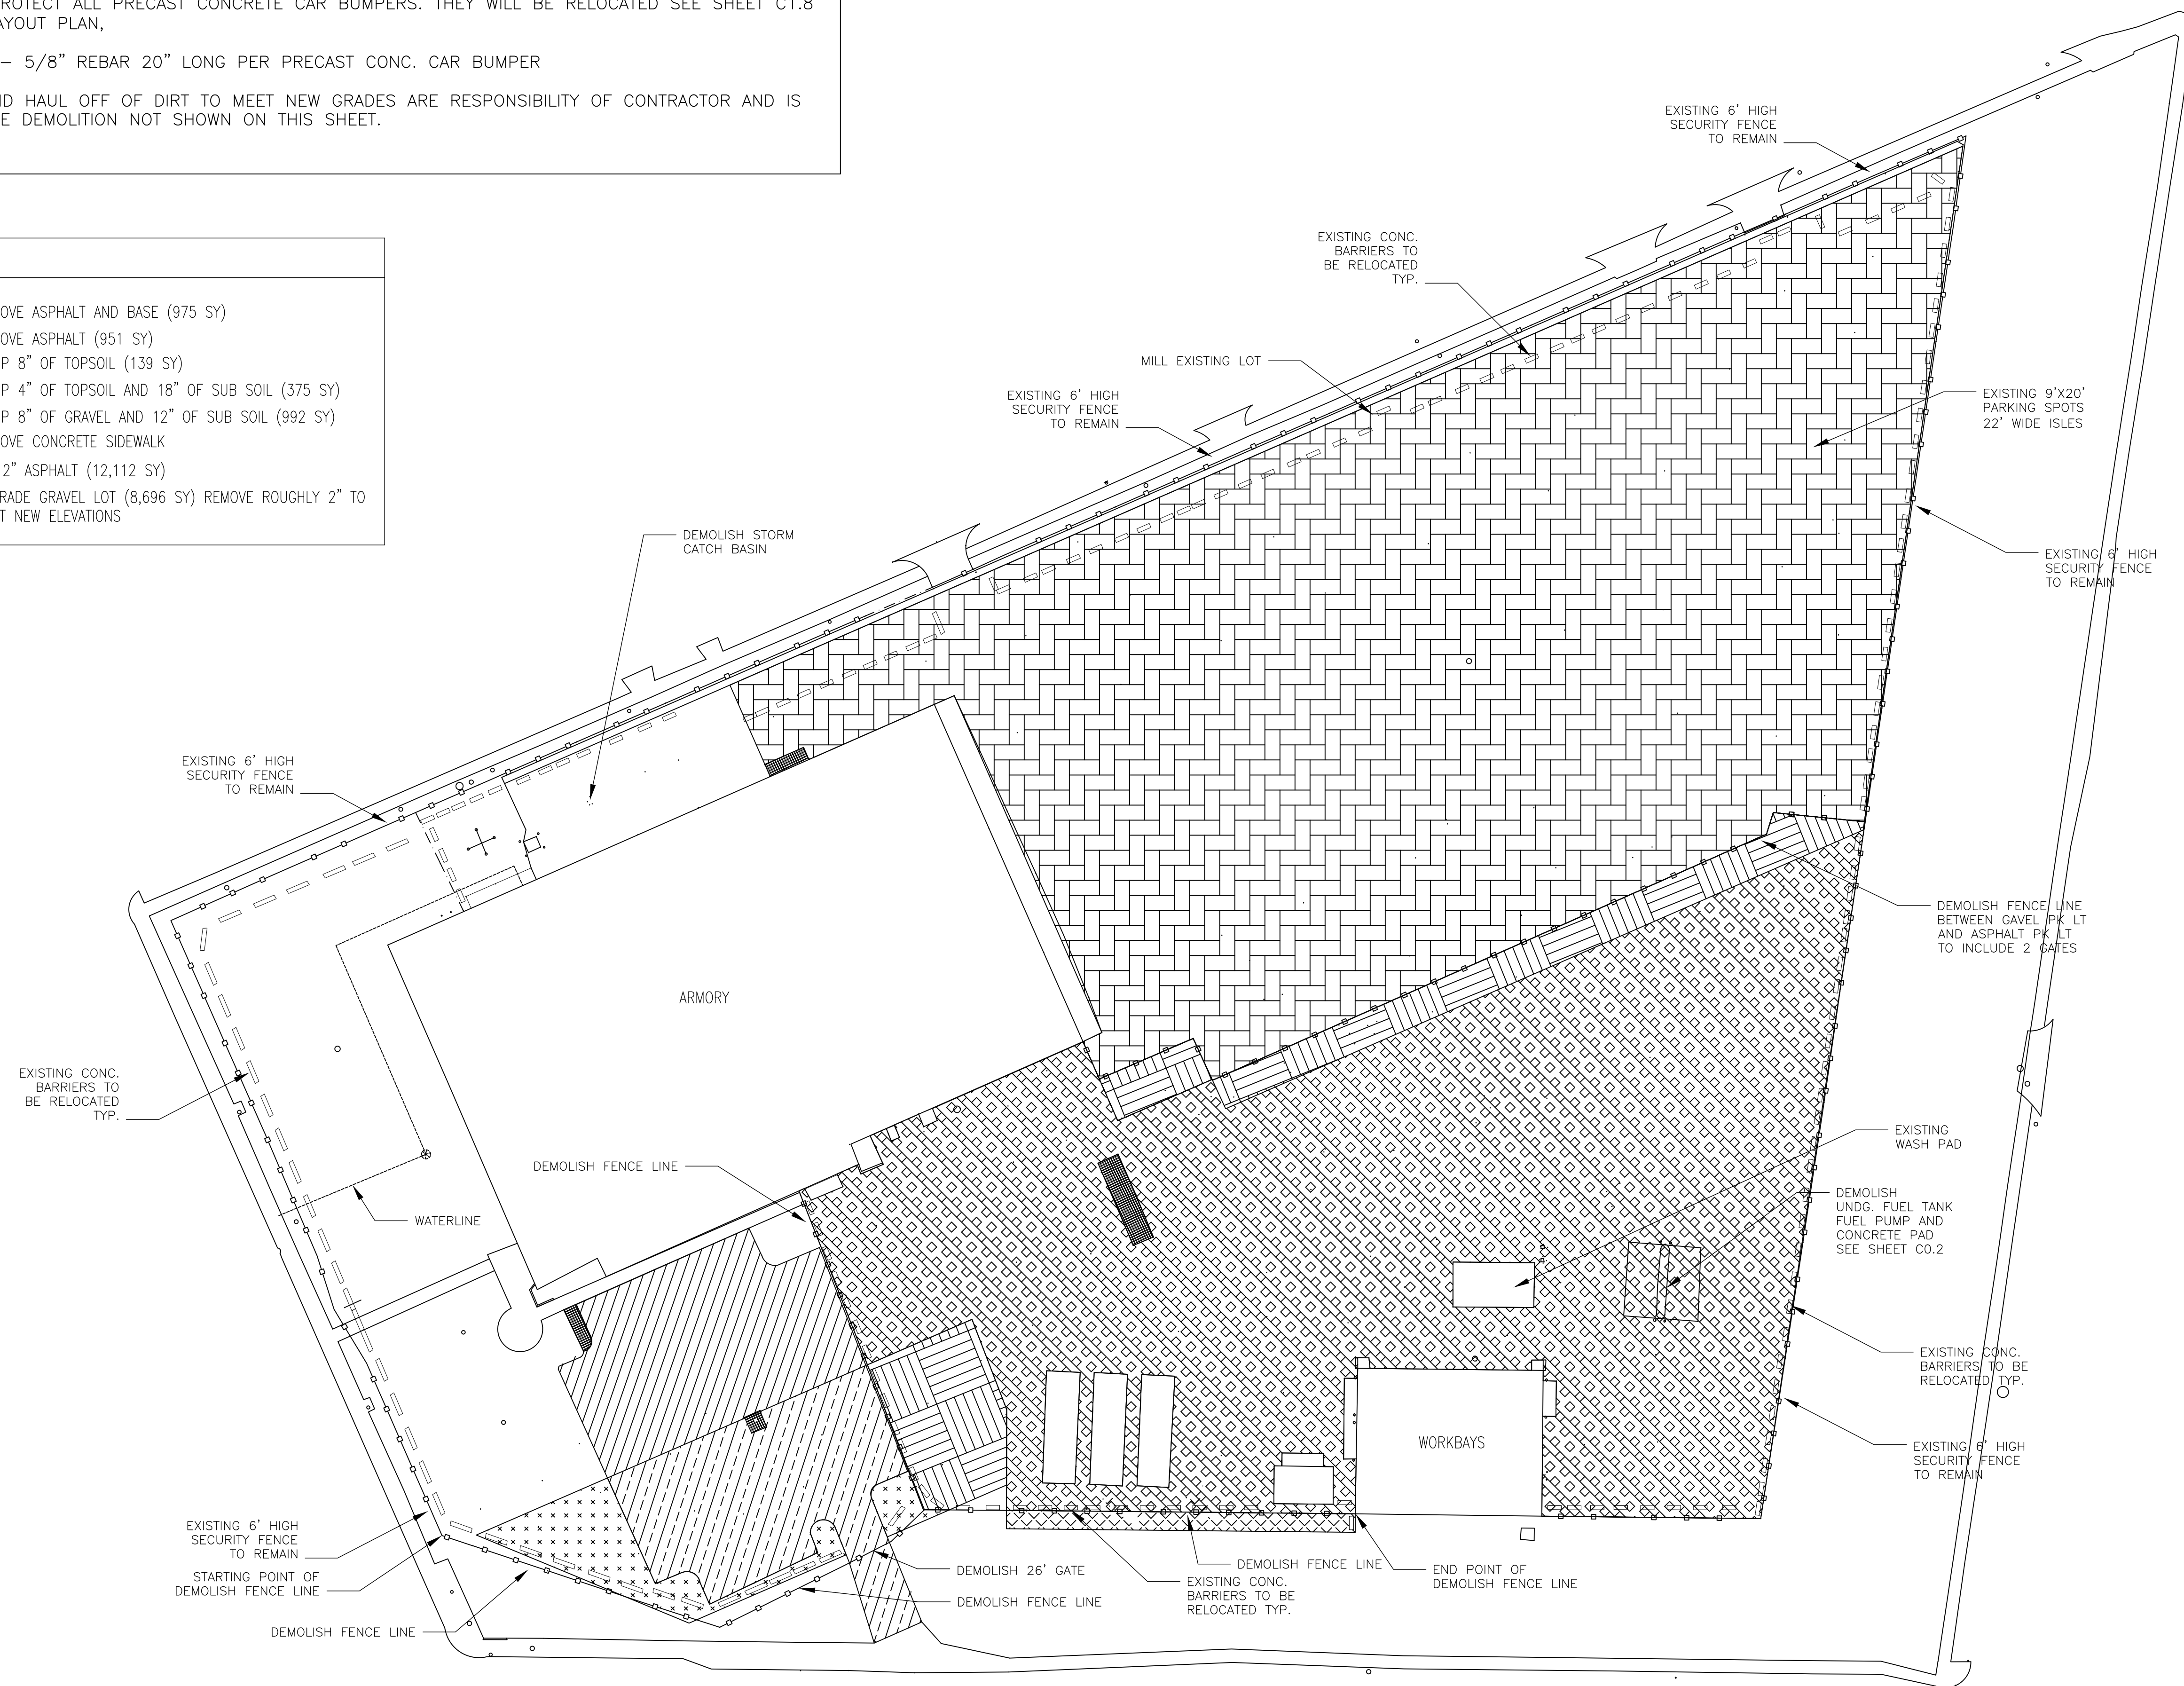

**EXISTING SITE DEMO PLAN**  
SCALE: 1" = 40'

**ADDENDUM 1 REVISED**  
1. DEMOLISH FENCE NOTES ADDED  
2. NOTE ADDED ABOUT EXISTING CONC. BARRIERS APPLIES TO ALL AS EVERY ONE WILL NEED TO BE MOVED AND REINSTALLED/PLACED